


Jagg pipe-tee for temperature gauge installation

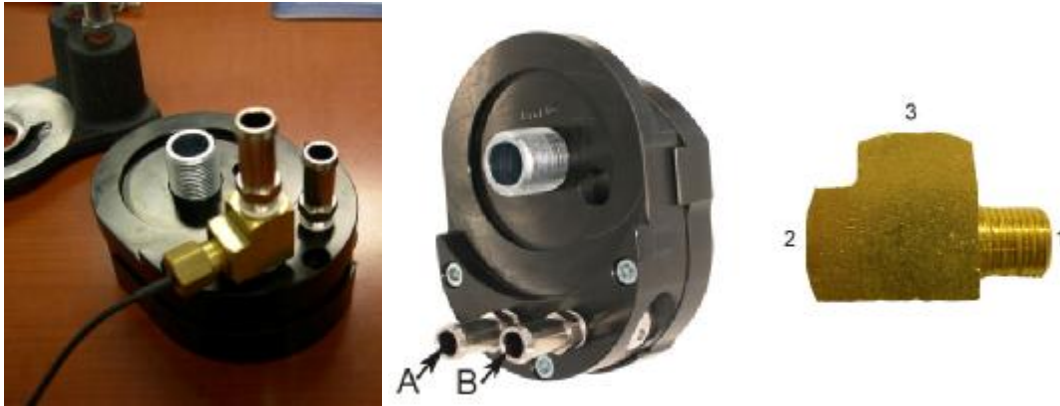

Hot filtered oil leaves port A of the oil filter adapter and travels to the oil cooler. Cool oil returns from the oil cooler to the engine via port B.

Instructions:

1. Remove the 3/8" push-on fitting from port A.
2. Apply Teflon pipe sealant (example Loctite 592) to 1/8" male pipe threads on fitting removed from Port A.

NOTE: 1/8" pipe threads should be installed to finger tight then tightened an additional 2 to 2-1/2 turns. (2 to 2-1/2 T.F.F.T.)

3. Install pipe thread end of removed fitting into female port #2 in pipe tee.
4. Apply Teflon pipe sealant to 1/8" male pipe threads on #1 male port of pipe tee.
5. Install #1 male port of pipe tee in port A of oil filter adapter.
6. You now have a 1/8" female pipe port, #3 in pipe tee, to install temperature sending unit according to instructions supplied with that component.

Manufactured & Marketed by:
Setrab USA, Inc.
27 B Greenscapes Court
Johnstown, OH 43031
(740)967-1726 tel. (740)967-1749 fax