

Setrab

New flexible range of intercoolers



Fully brazed construction for maximum performance.

Louvred fins give optimal heat transfer properties.

Our product range offers 50 different models with core length 250–600 mm.

Special designed tubes to give optimal performance with low pressure drop.

Setrab Intercooler core is available in 45 and 90 mm matrix width.

Performance calculations are available for any operating condition.

Setrab's air to air aluminium intercoolers are designed for high-performance automotive applications.

With 25 years of experience, our technical expertise has acquired the highest reputation among the world's most successful race teams.

*Flexible
Smarter
Easier*

Standard dimensions

Matrix Width

Setrab Intercoolers are available in 45 and 90 mm matrix width.

Core Length (L)

Standard core length is 250, 300, 400, 500 and 600 mm.

Height (H)


Number of tubes	Height H mm
7	125
12	205
15	253
18	302
21	350

50 standard dimensions


Each core length is available in all 5 heights, in both 45 and 90 mm matrix widths. Setrab Intercoolers are therefore available in 50 different dimensions to meet most requirements.

Fins


Louvered E-fins and 10 fins per inch (FPI) are standard.

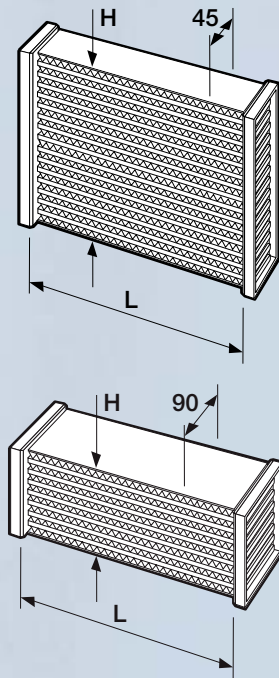


Other products

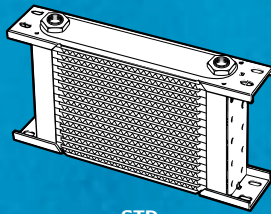


STD
Air-cooled oil cooler.

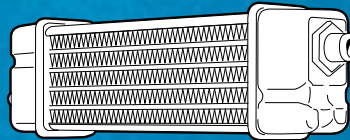


SLM
Air-cooled oil cooler.




TOC
Shell and tube cooler.

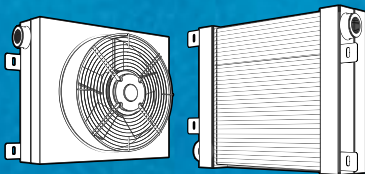

CP
Cooler complete with electrical fan.

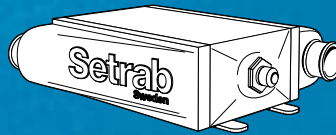

LOC
Water-cooled oil cooler.



LIC
Water-cooled charge-air cooler.

Setrab

OilCoolers

Setrab AB
Box 60016
SE-216 10 Malmö
Sweden
Tel: +46 (0)40-15 80 60
Fax: +46 (0)40-15 52 87

Setrab GmbH
Postfach 968
Buchenweg 3
D-82538 Geretsried
Germany
Tel: 08171 93230
Fax: 08171 51084

Setrab Verkaufsbüro Nord
Postfach 1733
D-25737 Heide
Germany
Tel: 0481 77605
Fax: 0481 77606

Setrab (UK) Ltd.
Bradfield Close,
Finedon Road Industrial Estate
Wellingborough
Northants NN84RQ
United Kingdom
Tel: 01933 222747
Fax: 01933 272041

Setrab USA, Inc.
P.O. Box 419
3958 North SR3
Sunbury, OH 43074
USA
Tel: +1 (740) 965 8837
Fax: +1 (740) 965 8852

E-mail: info@setrab.se • Internet: <http://www.setrab.com>